

z.LiNK[®] AV-Interface

ZL-MMI3G

for Audi MMI3G

AV-input without device control

Contents

1. Prior to installation

- 1.1. Delivery contents
- 1.2. Checking the compatibility of vehicle and accessories

2. Installation

- 2.1. Installation and activation of the interface
- 2.2. Connection assignment of the cable kit

3. Technical support

Information

Changes of the vehicle software can cause malfunctions of the interface. We offer free software-updates for interfaces for one year after purchase. To receive a free update, the interface must be sent in at own cost. Labor cost for and other expenses involved with the software-updates will not be refunded.

Product features

- Connection of a external AV-input

1. Prior to installation

Read the manual prior to installation.

Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

1.1. Delivery contents



HW _____ SW _____

Take down the SW-version and HW-version of the interface and store this manual for support purposes.

1.2. Checking the compatibility of vehicle and accessories

Requirements

Vehicle	Audi
Navigation	MMI3G

2. Installation

Switch off ignition and disconnect the vehicle's battery! The interface needs a permanent 12V source. If power source is not taken directly from the battery, the connection has to be checked for being start-up proven and permanent.


2.1. Installation and activation of the interface

Warning: Do not install interface while ignition is turned on.

1. Remove the navigation computer from the glove box on passenger side.




2. Disconnect the original Quadlock-connector from the device. Connect the green Fakra-plug (Video-Line) to the Navigation unit. Remove one of the two optical cables from the original Quadlock-connector and connect it to the enclosed LWL-connector. Connect the second optical cable to the original Quadlock-connector. Pay attention to the directional arrows as shown in the picture on the right.

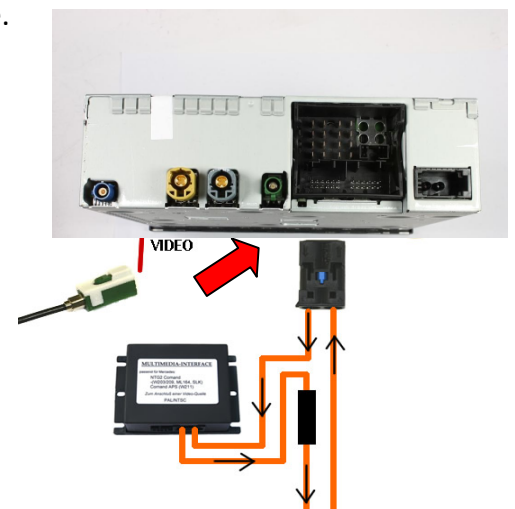

3. Connect the black wire of the cable kit to ground and the red wire to 12V plus. The corresponding control cable (e.g. for DVD device) is not supported.



4. Connect the three Cinch sockets of the interface to the video source using a Video / Audio Cinch cable (not included). Reconnect the original Quadlock- connector to the COMAND.

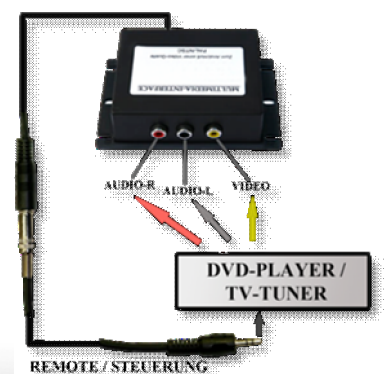


5. Re-attach system to center console.

6. After correct installation and switching on the ignition
In the Media menu appears a new icon “TV-Tuner”.
Now for switching to the connected device the TV-Tuner
icon have to be selected.



2.2. Connection assignment of the cable kit:

Cable color/Connector:	Connector/Assignment:
● Red:	+12V DC
● Black:	GND
3pin AMP connector:	Control (not supported)
Fakra-Green:	Video-Line

CE  12V DC